

FRANCIS AB

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	6.2
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	830 / 870
COLOUR TEMPERATURE	[K]	2700 / 3000
CRI		>95
BEAM ANGLE		36°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	134 / 140
POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER

MATERIAL
INGRESS PROTECTION
PROTECTION CLASS
NET WEIGHT
GROSS WEIGHT

ALUMINUM
IP20
III
0.14
0.17

WHITE ~RAL9003
BLACK ~RAL9005
BRASS
GUN METAL

COLOUR (HOUSING)
COLOUR (HOUSING)
COLOUR (HOUSING)
COLOUR (HOUSING)

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR 15° / 50°
HONEY COMB LOUVER




LIGHT DISTRIBUTION


36°

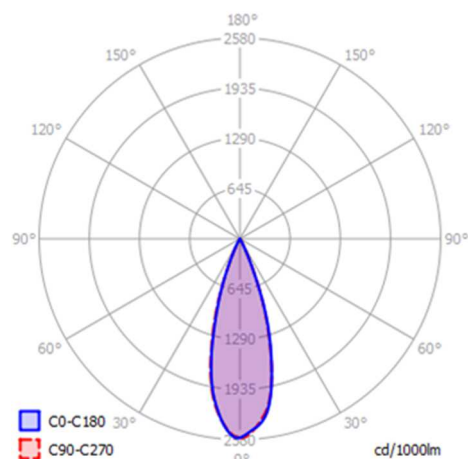


Colours:



MOUNTING DIMENSIONS mm



FIXTURE DIMENSIONS mm

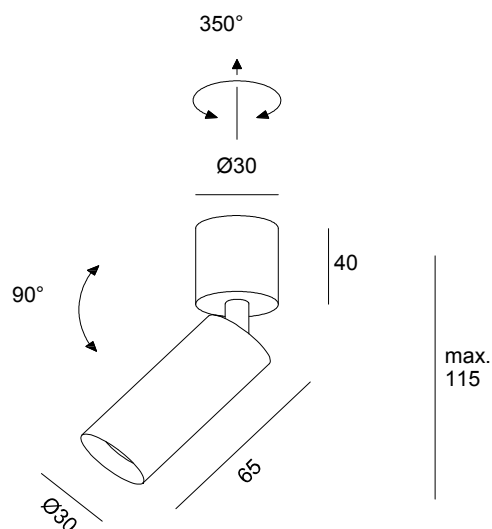

DLS LIGHTING

www.dslighting.com

*DLS
LIGHTING