rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



LD Showcase lights-bend 3W 350mA 20° 4000K chrome

Article nr.: 71934-40

130° inclined aluminium pole light for display case lighting · power: 3 W · light colour: 4000 K · luminous flux: 250 lm · beam angle: 20° · CRI: >90 · lifespan L70B50: >= 60.000 h · power supply: 350 mA DC · protection class III, IP20 · installation diameter: 14 mm · diameter base: 21 mm · diameter of pole: 8 mm · height: 300 mm · energy efficiency class: F

TECHNICAL DATA

Unit Code	pcs
BAR code	4251835793445
Housing colour	Chrom
Height	300.00 mm
Outer diameter	21 mm
Hole size	14 mm
Depth in ceiling	44.00 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	250.00 lm
Lightoutput per LED	83.33 lm



rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE




LD Showcase lights-bend 3W 350mA 20° 4000K chrome

Article nr.: 71934-40

TECHNICAL DATA

Lamp	including LED
IP rating	20
Power	3 W
Psb	0,00 W
Current mA	350 mA
Amount of LED	3
Material	Aluminium
Temperature range	-20 - 35
Energy ffficiency class	EEK-Label_F
CRI	≥ 90
Lifetime L70B50	60.000 h
Suitable light source	

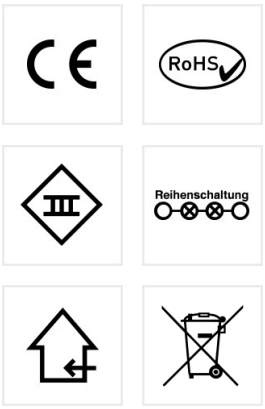

rutec LIGHTDESIGN GmbH | Carl-Zeiss-Str. 13 | 28857 Syke
TEL +49 4242 / 84034 - 0 | E-MAIL INFO@RUTECLIGHTDESIGN.DE | WWW.RUTECLIGHTDESIGN.DE



LD Showcase lights-bend 3W 350mA 20° 4000K chrome

Article nr.: 71934-40

TECHNICAL DRAWING

