

SOLANA CS III


SPECIFICATIONS

MOUNTING		TRACK
POWER	[W]	3x11
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	3x1850
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	74°
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	168


POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	4,38
GROSS WEIGHT	[kg]	5,70

COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005




Colours:

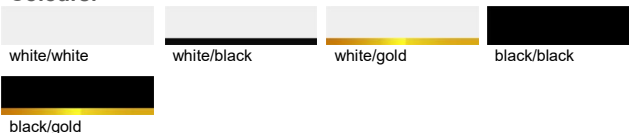

LIGHT DISTRIBUTION


74°

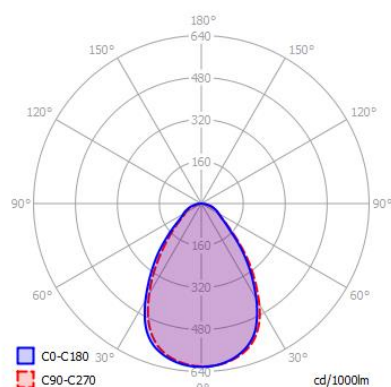



*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

MOUNTING DIMENSIONS

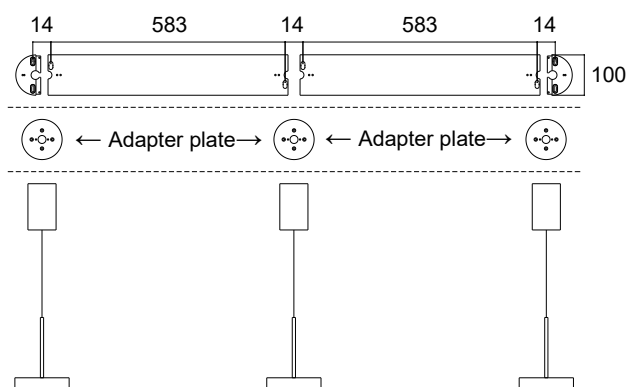

FIXTURE DIMENSIONS

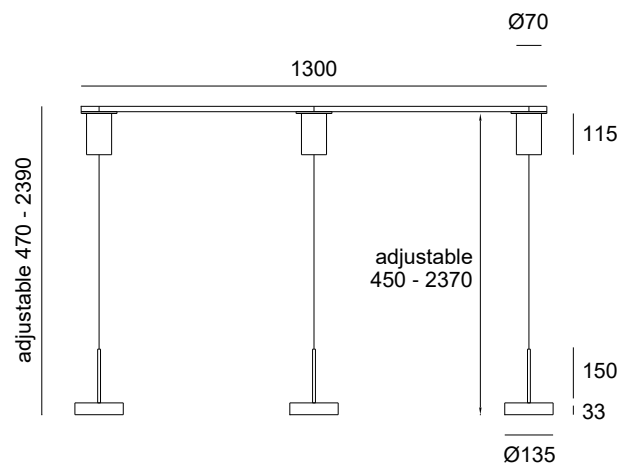

DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING