



STYX 3

LED-5L06E450BD1/194 MS DALI 4K#


WWW.OSMONT.CZ

STYX 3

Product code: STY61739


Type: LED-5L06E450BD1/194 MS DALI 4K#

Short description of the luminaire: Brass polished | ceiling or wall LED light DALI | TRIPLEX OPAL hand blown glass shade|



Technical data

Types of luminaires	Dimmable
Mounting type	surface mounted
Base material	polycarbonate
Shade material	three-layer glass TRIPLEX OPAL
Base color	polished brass
Shade color	white
Holding the shade	bayonet
Mounting location	ceiling/wall
Width	300 mm
Length	300 mm
Height	295 mm
Diameter	ø 300 mm
mounting holes (diameter)	4xø5mm
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C

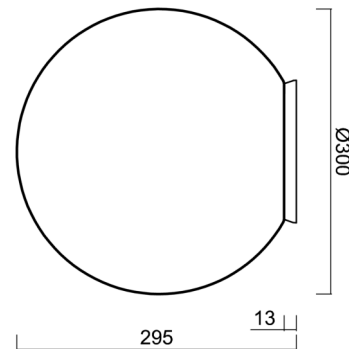


Electrical data

Power consumption	20 W
Ingress Protection	IP65
Socket	LED modul
terminal block	screw terminal block
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs
Spínací proud	5 A / 50 sec

Luminous data

Lum. flux of luminaire	3090 lm
Lum. flux of light source	3510 lm
Luminaire efficacy	154 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

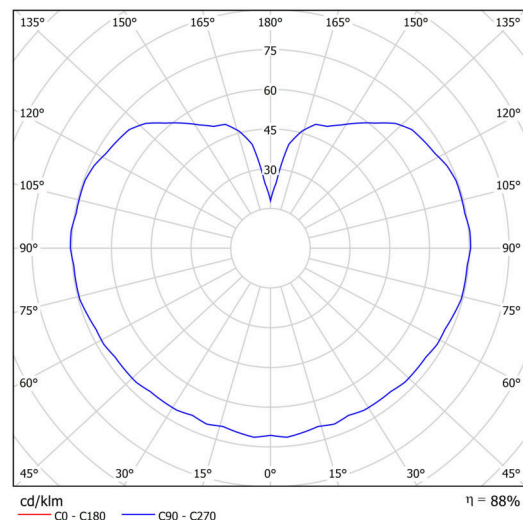

Eulum data for calculation programs are available at www.osmont.cz.

TECHNICAL SHEET




Logistical data

EAN	8591728137144
Weight NTTO	2.7 Kg
Weight BTTO	3 Kg
Number of cartons	1 pcs
Package volume	0.029 m ³
Package 1 width	0.31 m
Package 1 length	0.31 m
Package 1 height	0.305 m
Warranty*	60 months



**The warranty for the batteries is valid for 36 months from the date of purchase.*

Installation dimensions:

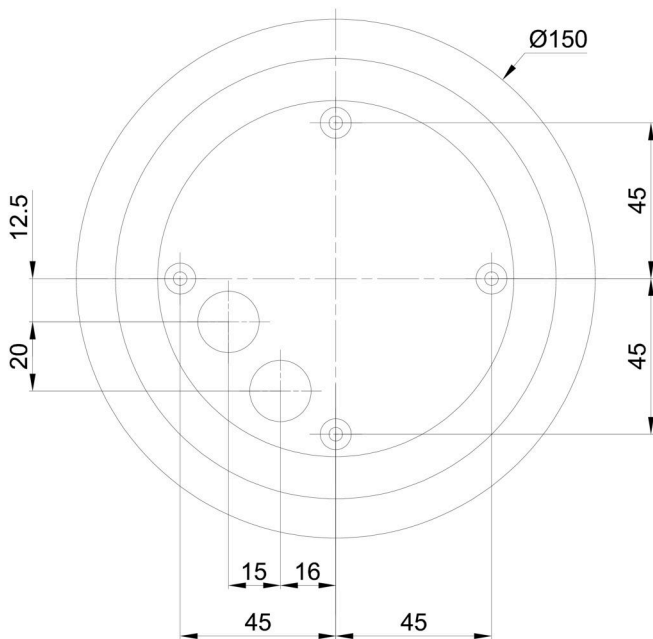

Additional assortment:

Base for surface mounting

Product code	Name	Color	Picture	Drawing
33521	BD1/BP 2-1 B	white Ral9003		

Lampshade

Product code	Name	Color	Picture	Drawing
20094	194	white	