

titano_inox

BOLLARD



Wattage 10 W

Voltage 220-240 Vac

Beam 




TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 10 W</u>
Total wattage	<u>12 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off (other controls on request*)</u>
Light colour	<u>2700 K • 3000 K • 4000 K (other colours on request**)</u>
Luminous flux	<u>890 lm (1200 lm***)</u>
Luminous efficacy	<u>74.2 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>> 90</u>
Life time	<u>L80-B15 > 60.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>I</u>

* **Control available on request**
DALI - 1/10V - DMX - TRIAC

** **Light colour available on request**
2200 K • RGBW

*** Source flux

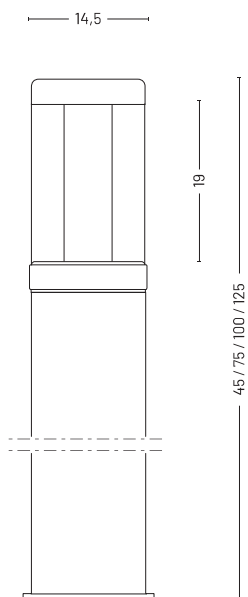

MATERIALS

<i>Body</i>	Inox AISI 316L
<i>Diffuser</i>	Extra clear polycarbonate
<i>Finishing</i>	Inox AISI 316L

ORDER CODE

TI 2 0 _ _ _ D _ B 1 0 Z	
Light colour	N 4000 K
	H 3000 K
	Y 2700 K
Height	045 45 cm
	075 75 cm
	100 100 cm
	125 125 cm

Example TI 2 0 **045** D H B 1 0 Z

AVAILABLE ACCESSORIES

<i>Code</i>	<i>Description</i>	<i>Page</i>
00A400	Root mounting kit	566
00A400.01P	Anchor bolt	566
0404M004	Single connection IP68	574
0404M003	Loop-in loop-out IP68	574