



modello:  
model:

**TOP IP**

codice:  
code:

**6740**

design:

**UT Egoluce**

anno - year:

**2022**

tipologia:

**fareto da incasso**

typology:

**recessed spotlight**

materiali:

**alluminio**

materials:

**aluminium**

luce:

**diretta**

light:

**direct**

sorgente luminosa:

**/XW** LED max 1,5W 500mA 199lm 2700K

light sources:

**/WW** LED max 1,5W 500mA 210lm 3000K

**/W** LED max 1,5W 500mA 221lm 4000K

life:

**> 50.000 h**

step MacAdam:

**3**

Indice di Resa Cromatica:

**>80**

Color Rendering Index:

grado IP - IP grade:

**44**

peso netto - net weight:

**0,04 Kg**

finiture - finishes:

**.01 bianco .01 white**

**.02 nero .02 black**

optional:

**0216** controcassa in materiale plastico  
plastic box

**0213** kit: box + plaster traforato  
kit: box + perforated plaster

marcatura:

**CE**


marking:

simboli costruttivi:

**F III IP44**  

symbols:

#### Dimensioni - Dimensions

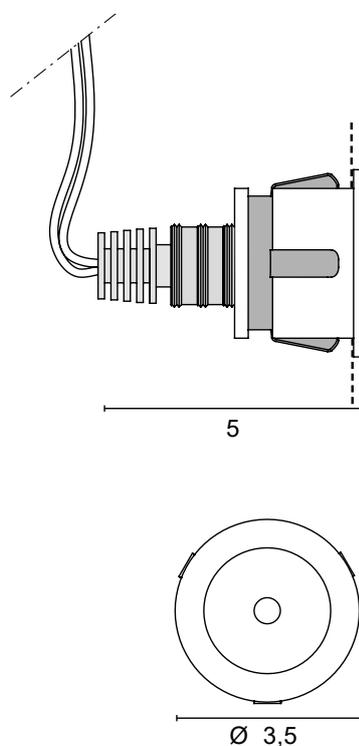


 3 cm

**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**




EGOLUCE s.r.l., via I.Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com

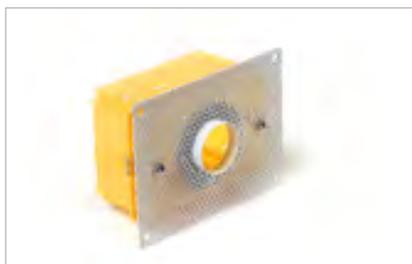**0213**

KIT: box + plaster traforato  
 KIT: box + perforated plaster

**0216**


Controcassa in materiale plastico  
 Plastic box

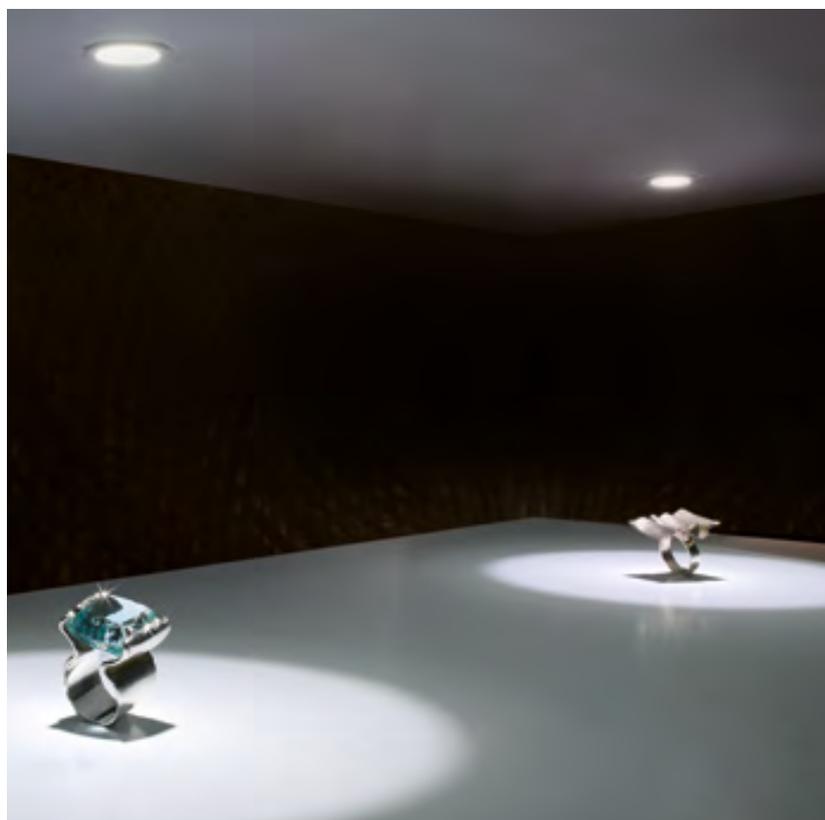

EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: [info@egoluce.com](mailto:info@egoluce.com) - <http://www.egoluce.com>

**LED DRIVERS** in corrente continua  
**LED DRIVERS** constant current
**0127**

**LED driver**  
 IN: 100 - 240V  
 OUT: 500 mA  
 1-6 Power LED




11,6 x 3,4 x 2 cm  4 cm

SELV CLASS 2  

**0169/50**

**Multipower LED driver**  
 IN: 220 - 240V  
 OUT: 500mA  
 min. 4 max 15 Power LED




13 x 7,5 x 3 cm  8,5 cm

SELV 

**DRIVERS DIMMERABILI** in corrente continua  
**DIMMABLE LED DRIVERS** constant current
**0129 Dimmer LED**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-14 Power LED



10,5 x 7 x 2,2 cm  7,2 cm SELV    

**0129/DALI Dimmer LED**


**Multipower dimmable driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 2-12 Power LED



10,5 x 7 x 2,2 cm  7,2 cm SELV   

**0141/DALI**


**LED driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-11 Power LED



11,1 x 5,2 x 2,5 cm  5,5 cm   

**0141/DIM**

**LED driver**  
 IN: 110 - 240V  
 OUT: 500 mA, 1-11 Power LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm  5,5 cm    

**0145 Dimmer LED Maxi**

**Multipower dimmable driver**

IN: 110 - 240V  
 OUT: 500 mA, 1-21 Power LED




12,3 x 8 x 2,2 cm  8,4 cm SELV    

**0145/DALI Dimmer LED Maxi**

**Multipower dimmable driver**

IN: 110 - 240V  
 OUT: 500 mA, 1-21 Power LED



12,3 x 8 x 2,2 cm  8,4 cm SELV     

**0133**


Cavo di sincronizzazione per dimmer LED  
 Synchronization cable for LED dimmer  
 (art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



L 150 cm

**0726/DIM**

**LED dimmer**  
 TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
 PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)  
 IN: 220 - 240V  
 OUT: 24V - 20W  
 500 mA, 1-12 Power LED



16,5 x 4,5 x 3,5 cm  5,6 cm SELV   



EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: info@egoluce.com - http://www.egoluce.com