

VEGA T FLEX

SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	190
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	60
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	95
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		BRASS / ALUMINIUM / LEATHER
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,27
GROSS WEIGHT	[kg]	0,30
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		CHROME
COLOUR (HOUSING)		PLATINUM
LEATHER SLEEVE		CAMEL or ESPRESSO

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

n/a

OPTIONS / OPTIONAL ACCESSORIES

2700K and 4000K LED on request

LEATHER COLOURS



espresso camel

Colours




black


chrome

platinum

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

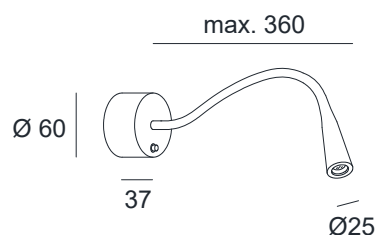

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING